

# AQUAHIVE

Energy-Efficient  
concentration of industrial effluents  
and circularization of process water



# TOWARDS A MORE SUSTAINABLE INDUSTRY


---

**Environmental regulations are getting tougher and water pressure is intensifying**

- The treatment of industrial water (PFAS, ionic and organic compounds,...) must be organized
- Water consumption must be reduced to anticipate future shortages
- We must continue to reduce the carbon footprint

# THE AQUAHIVE® SOLUTION

## Water vapor extraction by membrane separation

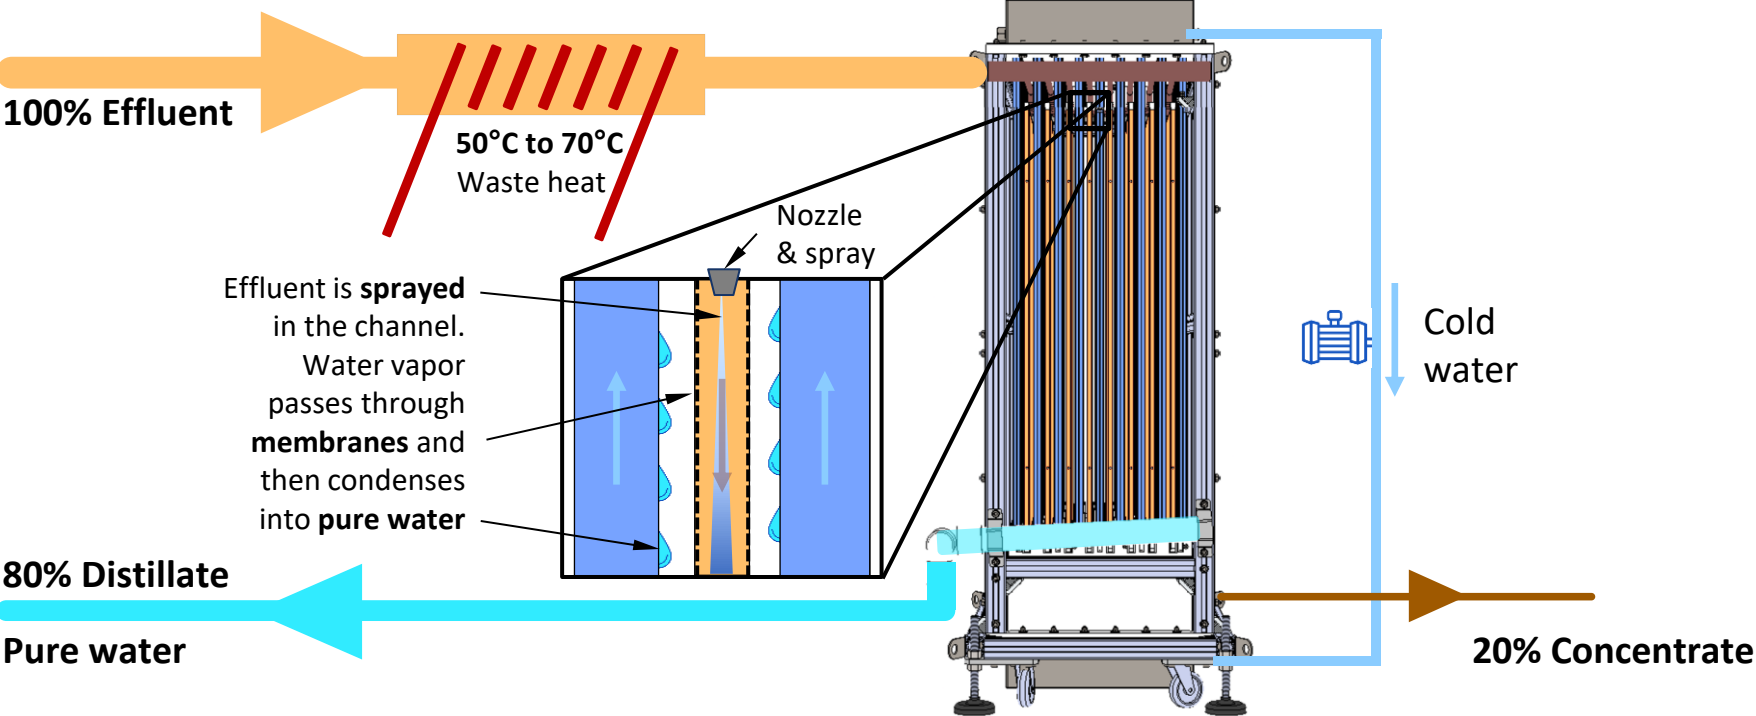

# FEATURES


---

- Filters all pollutants including **organic & PFAS**
- **Concentration of up to 80%** of polluted effluents
- **High purity** of the 1-pass outlet water: 5-9  $\mu\text{S}\cdot\text{cm}^{-1}$
- **High energy efficiency** thanks to low-temperature waste heat (from 50°C)



# OPERATIONAL LAYOUT

## Container Unit

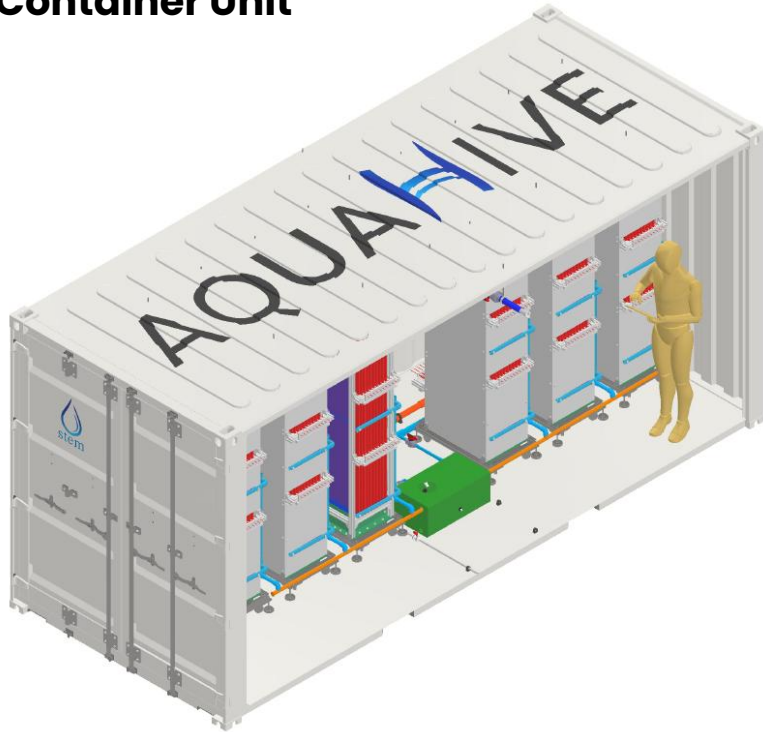

Characteristic	Unit	Value
Inflow	m <sup>3</sup> / jour	<b>3,0</b>
Distillate flow rate	m <sup>3</sup> / jour	<b>2,4</b>
Distillate quality	μS.cm-1	<b>5-9</b>
Concentration	Distillate/Effluent	<b>5</b>
Qty of modules		<b>4</b>
Container surface	m <sup>2</sup>	<b>15</b>
Consumption (with waste heat)	kWh/m <sup>3</sup> effluent	<b>1,0</b>
Consumption (without waste heat)	kWh/m <sup>3</sup> effluent	<b>160</b>

# BENEFITS

---

- **No chemical or biological pre-treatment** of effluent
- **Simplified membrane maintenance:** operation at atmospheric pressure and standard materials
- Capable of treating **different sources of effluent** (process water, wash water, rainwater, etc.) **without changing configuration** or membrane
- **Possible financing** with CEE and/or Water Agencies

# COMPARATIVE

Technology ↗	AQUAHIVE®	Reverse osmosis	Nanofiltration / Ultrafiltration	Evapo-concentration under vacuum
<b>Pollutants ↘</b>	<ul style="list-style-type: none"> <li>✓ Low pre-treatment</li> <li>✓ Easy maintenance</li> </ul>	<ul style="list-style-type: none"> <li>⚡ Complex pre-treatments</li> <li>⚡ High maintenance</li> </ul>	<ul style="list-style-type: none"> <li>Medium pre-treatment</li> <li>Average maintenance</li> </ul>	<ul style="list-style-type: none"> <li>⚡ Medium to high pre-treatment</li> <li>⚡ Medium to high maintenance</li> </ul>
<b>Dissolved Salts / Chlorides / Salinity / SEC-SEH</b>	✓ Highly effective	✓ Highly effective	⚠ Inefficient	✓ Highly effective
<b>Heavy metals (Pb, Cd, Zn, Ni, Cu...)</b>	✓ Highly effective	✓ Effective	⚠ Average	✓ Highly effective
<b>COD / OBD 5</b>	✓ Highly effective	✓ Effective	⚠ Inefficient	✓ Highly effective
<b>NTK (Organic Nitrogen + Ammonia)</b>	⚠ Volatile NH <sub>3</sub> according to pH/T°	✓ Highly effective	⚠ Average	⚠ Depends on volatility
<b>NOx (Nitrates / Nitrites)</b>	⚠ Depends on volatility	✓ Highly effective	⚠ Average	⚠ Average
<b>Total Phosphorus (Pt)</b>	✓ Highly effective	✓ Highly effective	⚠ Average	✓ Highly effective
<b>HCT (Total Hydrocarbons)</b>	✓ Highly effective	⚠ Average	⚠ Inefficient	⚠ Depends on volatility
<b>Organohalogens (AOX, chlorinated solvents)</b>	⚠ Depends on volatility	✓ Effective	⚠ Inefficient	⚠ Depends on volatility
<b>Organo-aromatics (PCBs) and Organo-polycyclics (PAHs)</b>	✓ Highly effective	✓ Effective	⚠ Inefficient	✓ Highly effective



# EQUIPPED SITE

---

## Food alcohol distillation site

Application :

- Treatment of phlegmasses at the distillation outlet before evacuation to the treatment plant
- Circularization of pure water without organic compounds to steam generation processes

## Operating Parameters

- Cold solution temperature: 20°C (supplied by the network)
- Hot effluent temperature: 60°C (already hot phlegmasses)



# EQUIPPED SITE



## Results and Analysis

Hot phlegmasses (55-60°C) are directed at the AQUAHIVE® pilot. After a few hours of operation, the distilled water produced by the pilot is collected and analyzed.

Parameter analyzed	Input flegmasses	Output pure water
pH	6,594	6,090
Conductivity ( $\mu\text{S.cm}^{-1}$ )	129,5	5,4
Chlorides (ppm)	0,14	0,07
Sulfates (ppm)	17,49	0,33
COD (mg/L)	179	<20

# TIMELINE

---

- Data Collection Form
- Pre-study, sample analysis, technical exchanges, feasibility analysis,
- Solution brief: Selected configuration
- Site visit and quotation,



# CONCLUSION

---

The **best solution** to **significantly reduce the treatment bill** for charged industrial effluents while **improving its water sobriety**



**STEM SAS**

Nous contacter :  
[sales@stem-tech.fr](mailto:sales@stem-tech.fr)